RevNo	Revision note	Date	Signature	Checked
02	add a sectional view	11/20/2018	Teresa	Simon
A	Released	6/25/2019	Teresa	Simon

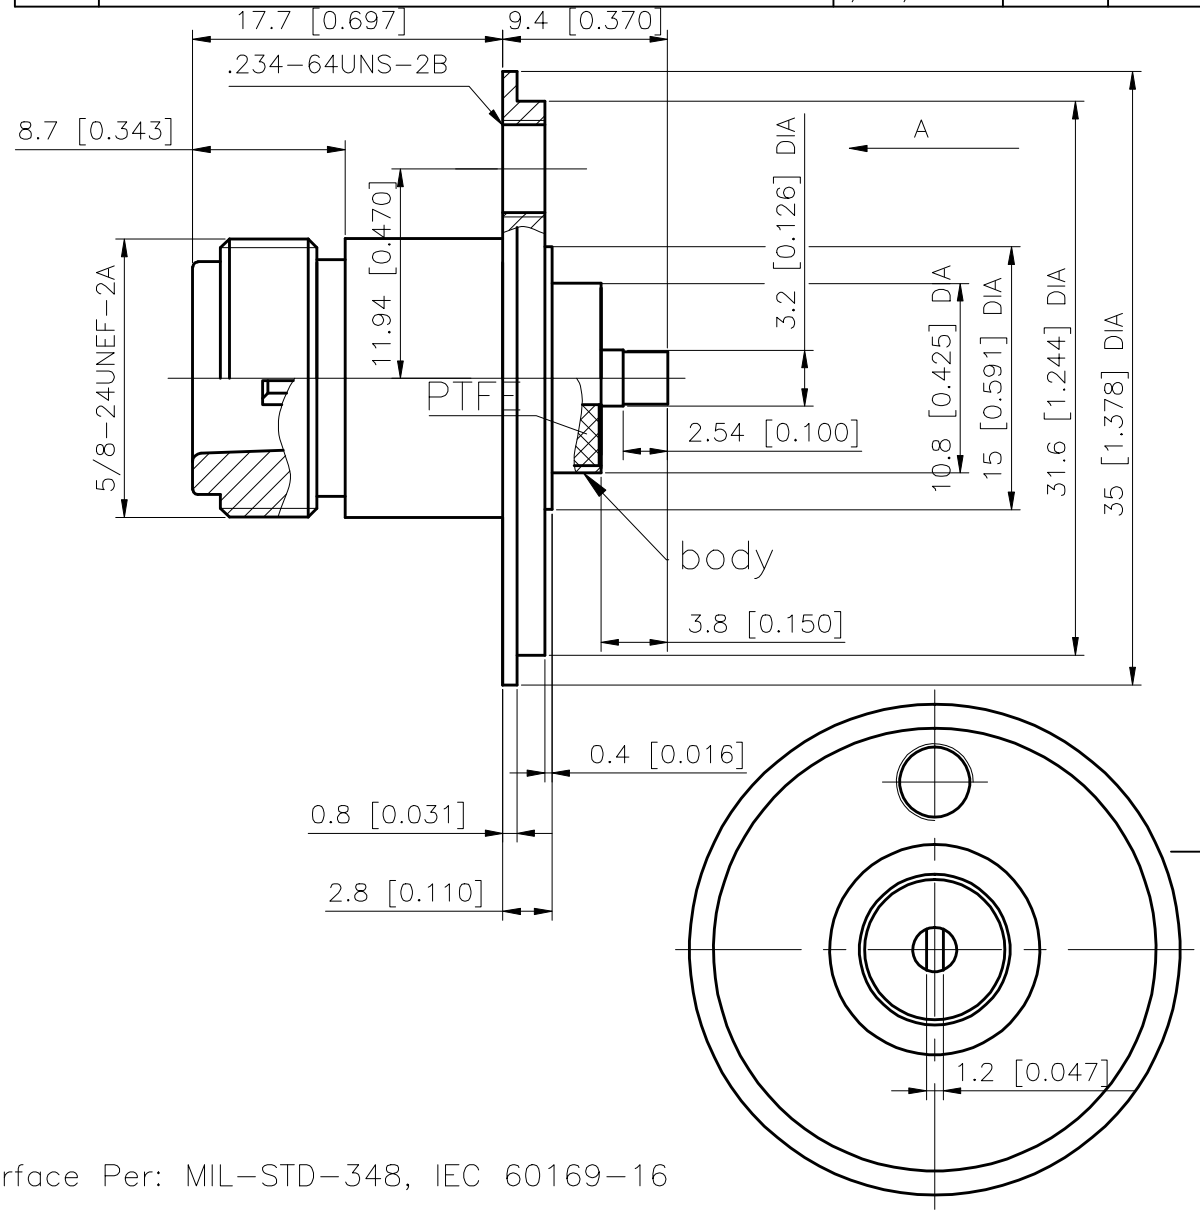

Interface Per: MIL-STD-348, IEC 60169-16

Material & Finishing:
1. Center condutor: Beryllium Copper, Silver Plating
2. Insulators: PTFE
3. Body: Brass, Albaloy Plating

Electrical Data:
1. Impedance: 50 Ohms
2. PIM: -150dBC @ 2x20watts

Mechanical Data:
1. Durability: 500 cycles

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

LIJEN, LLC from KERUI

THESE DRAWING & SPEC. ARE THE PROPERTY OF LIJEN, LLC FROM KERUI AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64/ MAX.

ALL TOLERANCES ARE:

DECIMALS	FRACTIONS	ANGLES
x ± 1.0	±1/64	x° ± 1°
x.x ± 0.5		x°x' ± 0.5'
x.xx ± 0.1		

Title: Coaxial Connector N(f) loop plate receptacle Jack tap .234-64 UNS-2B (N-KFD-1)

Drawn by	Ckd by	Appd by	Date
Teresa	Simon	Richard	10/30/2018

Scale	Sheet	
2.5:1	Sheet 1 of 1	80 1121 043 27