


1	2	3	4
RevNo	Revision note	Date	Signature
00	Sketch only	10/22/24	Teresa Simon

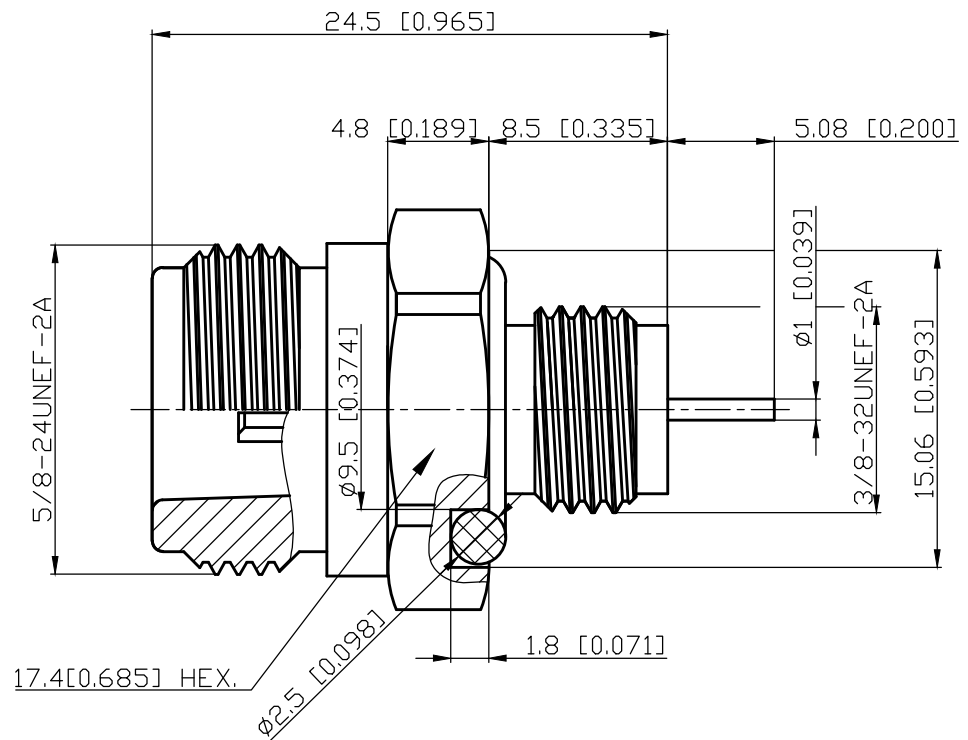

Interface Per: MIL-STD-348, IEC 60169-16

Material & Finishing:

- Center condutor: Beryllium Copper, Gold Plating
- Insulators: PTFE
- Body: Brass, Nickel Plating
- Gasket: Silicone Rubber

Electrical Data:

- Impedance: 50 Ohms
- Frequency Range: DC to 11 GHz
- VSWR: 1.2:1 @ 3GHz

PN:SCD142-10105-18

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

KERUI ELECTRONIC CO;LTD

Title
N Connector Bulkhead Receptacle Front Mount (N-KYD-3)

THESE DRAWING & SPEC. ARE THE PROPERTY OF LIJEN, LLC FROM KERUI AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64/MAX.
ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
x ± 1.0 x' ± 1°
x.x ± 0.5 x'x' ± 0.5°
x.xx ± 0.1 ±1/64

Drawn by
Teresa

Ckd by
Simon

Appd by
Richard

Date
10/22/2024

Scale

3:1

Sheet 1 of 1

80 1121 071 11