


1	2	3	4	
RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	7/8/14	Teresa	Simon

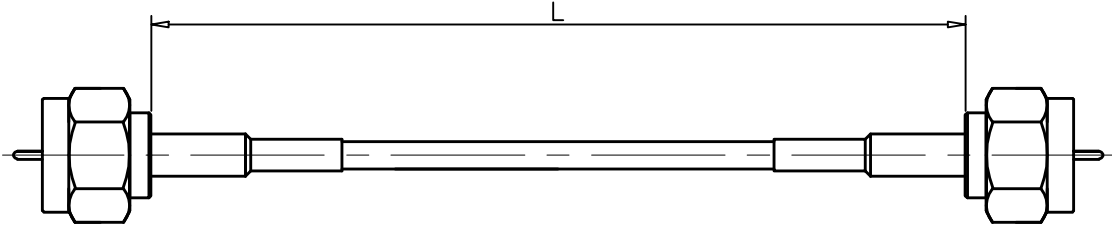

Interface Per: IEC 60169-24

Material & Finishing:

- 1. Center conductor: Brass Copper, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Nickel Plating
- 4. Coumping Nut: Brass, Nickel, Gold
- 5. Crimp Ferrule: Brass. Nickel

Cable:

- 1. Center Conductor: Silver Plated Copper Clad Steel
- 2. Insulator: PTFE
- 3. Outer Conductor: Silver Plated Copper Braid
- 4. Jacket: FEP

Heat Shrink Tube: Polyolefine

Electrical Data:

- 1. Impedance: 75 Ohms
- 2. Frequency Range: DC to 1.0 GHz
- 3. Insulation Resistance: 1000 Megohms
- 4. Dielectric Withstanding Voltage: 750 V Min.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

KERUI ELECTRONIC CO;LTD

Title
F male to F male crimp with RG179 cable

THESE DRAWING & SPEC. ARE THE PROPERTY OF KERUI ELECTRONIC CO;LTD AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64/MAX.
ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
x ± 1.0 ±1/64 x' ± 1'
x.x ± 0.5 x'x' ± 0.5
x.xx ± 0.1

Drawn by Teresa	Ckd by Simon	Appd by Richard	Date 7/8/2014
Scale 1.5:1	Sheet 1 of 1	C651651 04 11 01	