


1	2	3	4	
RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	7/14/14	Teresa	Simon

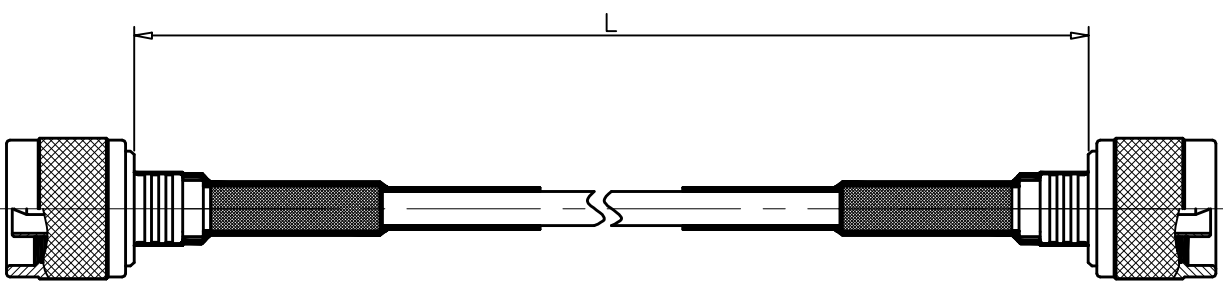

Interface of N connector Per: MIL-C-39012, IEC 60169-16  
 Material & Finishing:

1. Center condutor: Brass, Gold Plating
  2. Insulators: PTFE
  3. Gasket: Silicone Rubber
  4. Body : Brass, Nickel Plating
  5. Coupling Nut: Brass, Nickel Plating
  6. Snap Ring: Phosphor Bronze
- Heat Shrink Tube: Polyolefine

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency Range: DC to 6.0 GHz
3. Insulation Resistance: 1000 Megohms
4. Dielectric Withstanding Voltage: 1000 V Min.
5. VSWR: ≤1.2
6. Insertion Loss:

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

KERUI ELECTRONIC CO;LTD

Title  
 N male to male  
 solder with maxishield 142 FJ calbe

THESE DRAWING & SPEC. ARE THE PROPERTY OF KERUI ELECTRONIC CO;LTD AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64/MAX.  
 ALL TOLERANCES ARE:  
 DECIMALS FRACTIONS ANGLES  
 x ± 1.0 ±1/64 x' ± 1'  
 x.x ± 0.5 x'x' ± 0.5  
 x.xx ± 0.1

Drawn by Teresa	Ckd by Simon	Appd by Richard	Date 7/14/2014
Scale 1:1	Sheet 1 of 1	C801801 13 33 01	